



# **ALUMINIUM TRUNKING FOR FLOOR INSTALLATION**

### Trunking



### Accessories - Anodised aluminium end cover



# Accessories - Junction from the DCS trunking to perimeter trunking

	From 85x18 mm DCS trunking	From 130x18 mm DCS trunking
To 65x20 mm aluminium Mini-trunking	TFA965417 /8	TFA965418 /8
To aluminium K45 trunking 70x50 mm	-	TFA970418 /8

## Bases for connection to the 85x18 mm and 130x18 mm DCS floor trunking

	KTA804 /8	KTA813 /8	KTA822 /8	KTA8229 /8	KTA831 /8
No. of pre-punched holes per trunking of 130x18 mm	0	1	(for trunking of 130x18 mm at 180°)	2 (for a 130x18 mm trunking at 90°)	3
No. of pre-punched holes per trunking of 85x18 mm	4	3	2	2	1





KTA904 /8
Top cover for distribution base



ALKA02 /8 Auxiliary base cover for adapting K45 Mini-columns








# **AUMINIUM MINI-TRUNKING**

#### **ALUMINIUM MINI-TRUNKING ACCESSORIES**

#### Plate for Electrobanda French socket




#### Plate for Electrobanda Schuko socket



#### **DCS SYSTEM**


- Product designed according to the Safety Requirements of Directive 2006/95/EC (Low Voltage) through standard UNE-EN-50.085.
- Compliant with Spanish ICT regulations according to Royal Decree 401/2003, section 8, "Safety requirements between installations".
- C€ marked product.
- IP protection level: 4x.
- Manufactured in Anodised Aluminium.

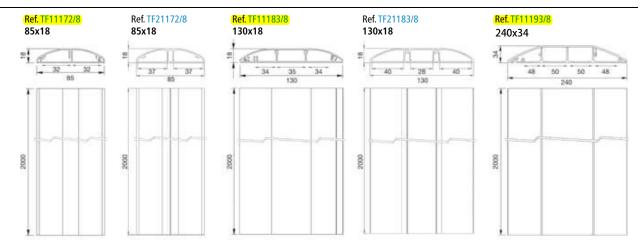

Reference	Load per unit of maximum area (kg/cm²)	IK
TF11172/8	45	IK08
TF21172/8	65	IK10
TF11183/8	55	IK07
TF21183/8	75	IK08
TF11193/8	100	IK10

### DCS SYSTEM ACCESSORIES

#### **End cover**



Trunking	В	С	D
85x18	18	85	68
130x18	18	128	37
240x34	34	219	109

Measurements in mm