

Extracted from:

CATALOGUE

2023-2024

ELECTRICAL SYSTEMS

LIGHTING

04/09/2024

**Palazzoli**

# TOPTER





## TOPTER

Compact vertical interlocked socket-outlets in technopolymer

### ADVANTAGES



1

The socket insert is integrated in the body so that there are no screws that can result in weak points.

The fuse holder base is protected by a door with an ergonomic opening mechanism and indestructible keys. In the closing phase, the lid closes the fuse holders that have remained open.

2




3

The patented high visibility handle allows even the most inexperienced user to understand the status of the switch at a glance.



The auxiliary contact indicates if the plug is properly plugged in and can be used in electrical and automation safety circuits.

4

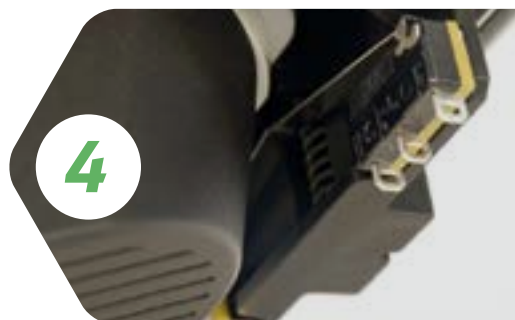

For quick and easy installation, scan the QR code.





# TOPTER

Compact vertical interlocked socket-outlets in technopolymer



Body material	Technopolymer
Colour	RAL 7035 Light grey
Protection rating	IP44 - IP66/IP67
Impact resistance	IK08
Resistance to abnormal heat and fire	850°C (insert) 650°C (enclosure)
Flammability class	V-2 (insert) HB (enclosure)
Insulation class	II
Ambient operating temperature	-25°C - +50°C
Ambient storage temperature	-30°C - +70°C
Rated current	16A - 32A
Operating voltage	24V - 440V
Insulation voltage	690V
Operating frequency	50/60Hz
Terminal type	Indirect clamping



## DIRECTIVES

2014/35/EU (LVD)  
2011/65/EU (RoHS)  
2012/19/EU (WEEE)

## PRODUCT STANDARDS

IEC/EN 60309-1  
IEC/EN 60309-2  
IEC/EN 60309-4  
IEC/EN 63000

Rated operating current:			16A	32A
Thermal current I <sub>th</sub>		A	16	32
AC-21A	110 V - 400 V	A	16	32
AC-22A	110 V - 400 V	A	16	32
AC-23A	110V	A	16	32
	230V			
	400V			
AC-23A	110V	kW	2.4	4.9
	230V		5.1	10.2
	400V		8.9	17.7
AC-3	110V	kW	2.4	4.9
	230V		5.1	10.2
	400V		8.9	17.7

Wiring data:		16A	32A
Entry cable cross-section	mm <sup>2</sup>	1 - 10	
Tightening torque	Nm	2	



# TOPTER

Compact vertical interlocked socket-outlets in technopolymer

## MODULARITY

